


# Dust scavenging blowers

## Direct current (DC), brushless



- Operating voltage: 27.5V
- Current consumption: 28 A
- RPM (open inlet): approx. 12,500/min
- Power consumption: 760 W
- Temperature range; -40°C to +100°C (shortly 120°C, max. 30 min)
- Inlet air temperature: max. 60°C
- System of protection: IP54 according to DIN EN 60529 (VDE 0470 Part 1)
- EMV-According to: MIL-STD-461F (-CE102; -CS101; -CS114; -RE102; -RS103)
- Vibration test: MIL-STD 810-D
- Shock: 10 g / 6 ms; 500 g / 0.5 ms
- High voltage test: DIN EN 50106 (VDE 0700 part 500)
- Weight: approx. 7.5 kg
- Surface protection: none

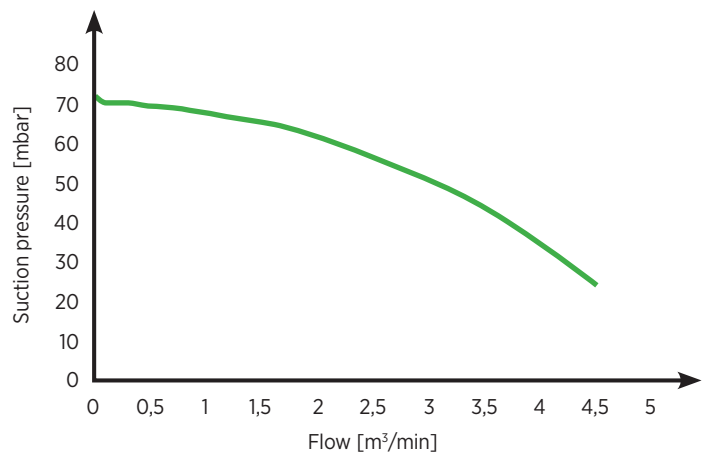

Download flyer